

## Bits and Bytes

Dr. Steve Goddard  
[goddard@cse.unl.edu](mailto:goddard@cse.unl.edu)

<http://cse.unl.edu/~goddard/Courses/CSCE230J>

## Giving credit where credit is due

- Most of slides for this lecture are based on slides created by Drs. Bryant and O'Hallaron, Carnegie Mellon University.
- I have modified them and added new slides.

2

## Topics

- Why bits?
- Representing information as bits
  - Binary/Hexadecimal
  - Byte representations
    - » numbers
    - » characters and strings
    - » Instructions
- Bit-level manipulations
  - Boolean algebra
  - Expressing in C

3

## Why Don't Computers Use Base 10?

### Base 10 Number Representation

- That's why fingers are known as "digits"
- Natural representation for financial transactions
  - Floating point number cannot exactly represent \$1.20
- Even carries through in scientific notation
  - $1.5213 \times 10^4$

### Implementing Electronically

- Hard to store
  - ENIAC (First electronic computer) used 10 vacuum tubes / digit
- Hard to transmit
  - Need high precision to encode 10 signal levels on single wire
- Messy to implement digital logic functions
  - Addition, multiplication, etc.

4


## Binary Representations

### Base 2 Number Representation

- Represent  $15213_{10}$  as  $11101101101101_2$
- Represent  $1.20_{10}$  as  $1.0011001100110011[0011]_{2} \dots_2$
- Represent  $1.5213 \times 10^4$  as  $1.1101101101101_2 \times 2^{13}$

### Electronic Implementation

- Easy to store with bistable elements
- Reliably transmitted on noisy and inaccurate wires

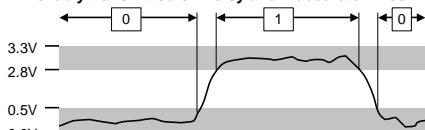

Straightforward implementation of arithmetic functions

5

## Byte-Oriented Memory Organization

### Programs Refer to Virtual Addresses

- Conceptually very large array of bytes
- Actually implemented with hierarchy of different memory types
  - SRAM, DRAM, disk
  - Only allocate for regions actually used by program
- In Unix and Windows NT (and 2000), address space is private to a particular "process"
  - Program being executed
  - Program can clobber its own data, but not that of others

### Compiler + Run-Time System Control Allocation

- Where different program objects should be stored
- Multiple mechanisms: static, stack, and heap
- In any case, all allocation within single virtual address space

6

## Encoding Byte Values

Byte = 8 bits

- Binary 00000000<sub>2</sub> to 11111111<sub>2</sub>
- Decimal: 0<sub>10</sub> to 255<sub>10</sub>
- Hexadecimal 00<sub>16</sub> to FF<sub>16</sub>
  - Base 16 number representation
  - Use characters '0' to '9' and 'A' to 'F'
  - Write FA1D37B<sub>16</sub> in C as 0xFA1D37B
  - » Or 0xfa1d37b

Hex	Decimal	Binary
0	0	0000
1	1	0001
2	2	0010
3	3	0011
4	4	0100
5	5	0101
6	6	0110
7	7	0111
8	8	1000
9	9	1001
A	10	1010
B	11	1011
C	12	1100
D	13	1101
E	14	1110
F	15	1111

7

## Machine Words

Machine Has “Word Size”

- Nominal size of integer-valued data
  - Including addresses
- Most current machines are 32 bits (4 bytes)
  - Limits addresses to 4GB
  - Becoming too small for memory-intensive applications
- High-end systems are 64 bits (8 bytes)
  - Potentially address  $\approx 1.8 \times 10^{19}$  bytes
- Machines support multiple data formats
  - Fractions or multiples of word size
  - Always integral number of bytes

8

## Word-Oriented Memory Organization

Addresses Specify Byte Locations

- Address of first byte in word
- Addresses of successive words differ by 4 (32-bit) or 8 (64-bit)

32-bit Words	64-bit Words	Bytes	Addr.
			0000
Addr = 0000			0001
			0002
	Addr = 0000		0003
			0004
Addr = 0004			0005
			0006
			0007
			0008
Addr = 0008			0009
			0010
	Addr = 0008		0011
			0012
Addr = 0012			0013
			0014
			0015

9

## Data Representations

Sizes of C Objects (in Bytes)

C Data Type	Compaq Alpha	Typical 32-bit	Intel IA32
● int	4	4	4
● long int	8	4	4
● char	1	1	1
● short	2	2	2
● float	4	4	4
● double	8	8	8
● long double	8	8	10/12
● char *	8	4	4
» Or any other pointer			

10

## Byte Ordering

How should bytes within multi-byte word be ordered in memory?

Conventions

- Sun's, Mac's are “Big Endian” machines
  - Least significant byte has highest address
- Alphas, PC's are “Little Endian” machines
  - Least significant byte has lowest address

11

## Byte Ordering Example

Big Endian

- Least significant byte has highest address

Little Endian

- Least significant byte has lowest address

Example

- Variable x has 4-byte representation 0x01234567
- Address given by &x is 0x100

Big Endian	0x100	0x101	0x102	0x103
	01	23	45	67
Little Endian	0x100	0x101	0x102	0x103
	67	45	23	01

12

## Reading Byte-Reversed Listings

### Disassembly

- Text representation of binary machine code
- Generated by program that reads the machine code

### Example Fragment

Address	Instruction Code	Assembly Rendition
8048365:	5b	pop %ebx
8048366:	81 c3 ab 12 00 00	add \$0x12ab,%ebx
804836c:	83 bb 28 00 00 00 00	cmpl \$0x0,0x28(%ebx)

### Deciphering Numbers

- Value: 0x12ab
- Pad to 4 bytes: 0x000012ab
- Split into bytes: 00 00 12 ab
- Reverse: ab 12 00 00

13

## Examining Data Representations

### Code to Print Byte Representation of Data

- Casting pointer to unsigned char \* creates byte array

```
typedef unsigned char *pointer;

void show_bytes(pointer start, int len)
{
    int i;
    for (i = 0; i < len; i++)
        printf("0x%p\t0x%.2x\n",
               start+i, start[i]);
    printf("\n");
}
```

Printf directives:  
%p: Print pointer  
%x: Print Hexadecimal

14

## show\_bytes Execution Example

```
int a = 15213;
printf("int a = 15213;\n");
show_bytes((pointer) &a, sizeof(int));
```

### Result (Linux):


```
int a = 15213;
0x1fffffc0 0x6d
0x1fffffc1 0x3b
0x1fffffc2 0x00
0x1fffffc3 0x00
```

15

## Representing Integers

```
int A = 15213;
int B = -15213;
long int C = 15213;
```

Decimal: 15213  
Binary: 0011 1011 0110 1101  
Hex: 3 B 6 D

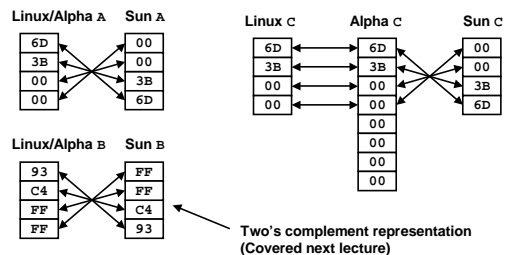

16

## Representing Pointers

```
int B = -15213;
int *P = &B;
```

Alpha Address  
Hex: 1 F F F F F F C A 0  
Binary: 0001 1111 1111 1111 1111 1111 1100 1010 0000

Sun P  
Sun Address  
Hex: E F F F F F B 2 C  
Binary: 1110 1111 1111 1111 1111 1011 0010 1100

Linux Address  
Hex: B F F F F F 8 D 4  
Binary: 1011 1111 1111 1111 1111 1000 1101 0100


Alpha P  
A0  
FC  
FF  
FF  
01  
00  
00  
00  
00  
Linux P  
D4  
F8  
FF  
BF

Different compilers & machines assign different locations to objects

17

## Representing Floats

Float F = 15213.0;



### IEEE Single Precision Floating Point Representation

Hex: 4 6 6 D B 4 0 0  
Binary: 0100 0110 0110 1101 1011 0100 0000 0000  
15213: 1110 1101 1011 01

Not same as integer representation, but consistent across machines

Can see some relation to integer representation, but not obvious

18

## Representing Strings

### Strings in C

```
char S[6] = "15213";
```

- Represented by array of characters
- Each character encoded in ASCII format
  - Standard 7-bit encoding of character set
  - Other encodings exist, but uncommon
  - Character "0" has code  $0 \times 30$ 
    - » Digit  $i$  has code  $0 \times 30 + i$
- String should be null-terminated
  - Final character = 0

Linux/Alpha s Sun s

31	←	→	31
35	←	→	35
32	←	→	32
31	←	→	31
33	←	→	33
00	←	→	00

### Compatibility

- Byte ordering not an issue
  - Data are single byte quantities
- Text files generally platform independent
  - Except for different conventions of line termination character(s)!

19

## Machine-Level Code Representation

### Encode Program as Sequence of Instructions

- Each instruction is a simple operation
  - Arithmetic operation
  - Read or write memory
  - Conditional branch
- Instructions encoded as bytes
  - Alpha's, Sun's, Mac's use 4 byte instructions
    - » Reduced Instruction Set Computer (RISC)
  - PC's use variable length instructions
    - » Complex Instruction Set Computer (CISC)
- Different instruction types and encodings for different machines
  - Most code not binary compatible

Programs are Byte Sequences Too!

20

## Representing Instructions

```
int sum(int x, int y)
{
    return x+y;
}
```

- For this example, Alpha & Sun use two 4-byte instructions
  - Use differing numbers of instructions in other cases
- PC uses 7 instructions with lengths 1, 2, and 3 bytes
  - Same for NT and for Linux
  - NT / Linux not fully binary compatible

Alpha sum

00
00
30
42
01
80
FA
6B

Sun sum

81
C3
E0
08
90
02
00
09

PC sum

55
89
E5
8B
45
0C
03
45
08
89
EC
5D
C3

*Different machines use totally different instructions and encodings*

21

## Boolean Algebra

Developed by George Boole in 19th Century

- Algebraic representation of logic
  - Encode "True" as 1 and "False" as 0

And

- $A \& B = 1$  when both  $A=1$  and  $B=1$

&	0	1
0	0	0
1	0	1

Or

- $A|B = 1$  when either  $A=1$  or  $B=1$

	0	1
0	0	1
1	1	1

Not

- $\sim A = 1$  when  $A=0$

~	
0	1
1	0

Exclusive-Or (Xor)

- $A \wedge B = 1$  when either  $A=1$  or  $B=1$ , but not both


^	0	1
0	0	1
1	1	0

22

## Application of Boolean Algebra

Applied to Digital Systems by Claude Shannon

- 1937 MIT Master's Thesis
- Reason about networks of relay switches
  - Encode closed switch as 1, open switch as 0



Connection when

$$A \& \sim B \mid \sim A \& B$$

$$= A \wedge B$$

23

## Integer Algebra

### Integer Arithmetic

- $\langle \mathbb{Z}, +, *, -, 0, 1 \rangle$  forms a "ring"
- Addition is the "sum" operation
- Multiplication is the "product" operation
- $-$  is the additive inverse
- 0 is the identity for sum
- 1 is the identity for product

24

## Boolean Algebra

### Boolean Algebra

- $\{0,1\}, |, \&, \sim, 0, 1\}$  forms a “Boolean algebra”
- Or is the “sum” operation
- And is the “product” operation
- $\sim$  is the “complement” operation (not additive inverse)
- 0 is the identity for sum
- 1 is the identity for product

25

## Boolean Algebra $\approx$ Integer Ring

- **Commutativity**

$$A | B = B | A \quad A + B = B + A$$

$$A \& B = B \& A \quad A * B = B * A$$
- **Associativity**

$$(A | B) | C = A | (B | C) \quad (A + B) + C = A + (B + C)$$

$$(A \& B) \& C = A \& (B \& C) \quad (A * B) * C = A * (B * C)$$
- **Product distributes over sum**

$$A \& (B | C) = (A \& B) | (A \& C) \quad A * (B + C) = A * B + B * C$$
- **Sum and product identities**

$$A | 0 = A \quad A + 0 = A$$

$$A \& 1 = A \quad A * 1 = A$$
- **Zero is product annihilator**

$$A \& 0 = 0 \quad A * 0 = 0$$
- **Cancellation of negation**

$$\sim(\sim A) = A \quad -(-A) = A$$

26

## Boolean Algebra $\neq$ Integer Ring

- Boolean: *Sum distributes over product*

$$A | (B \& C) = (A | B) \& (A | C) \quad A + (B * C) \neq (A + B) * (A + C)$$
- Boolean: *Idempotency*

$$A | A = A \quad A + A \neq A$$

• “A is true” or “A is true” = “A is true”

$$A \& A = A \quad A * A \neq A$$
- Boolean: *Absorption*

$$A | (A \& B) = A \quad A + (A * B) \neq A$$

• “A is true” or “A is true and B is true” = “A is true”

$$A \& (A | B) = A \quad A * (A + B) \neq A$$
- Boolean: *Laws of Complements*

$$A | \sim A = 1 \quad A + -A \neq 1$$

• “A is true” or “A is false”
- Ring: *Every element has additive inverse*

$$A | \sim A \neq 0 \quad A + -A = 0$$

27

## Boolean Ring

## Properties of $\&$ and $\wedge$

- $\{0,1\}, \wedge, \&, I, 0, 1\}$
- Identical to integers mod 2
- $I$  is identity operation:  $I(A) = A$
- $A \wedge A = 0$

### Property

### Boolean Ring

- Commutative sum  $A \wedge B = B \wedge A$
- Commutative product  $A \& B = B \& A$
- Associative sum  $(A \wedge B) \wedge C = A \wedge (B \wedge C)$
- Associative product  $(A \& B) \& C = A \& (B \& C)$
- Prod. over sum  $A \& (B \wedge C) = (A \& B) \wedge (A \& C)$
- 0 is sum identity  $A \wedge 0 = A$
- 1 is prod. identity  $A \& 1 = A$
- 0 is product annihilator  $A \& 0 = 0$
- Additive inverse  $A \wedge A = 0$

28

## Relations Between Operations

### DeMorgan's Laws

- Express  $\&$  in terms of  $|$ , and vice-versa
  - $A \& B = \sim(\sim A | \sim B)$ 
    - » A and B are true if and only if neither A nor B is false
  - $A | B = \sim(\sim A \& \sim B)$ 
    - » A or B are true if and only if A and B are not both false

### Exclusive-Or using Inclusive Or

- $A \wedge B = (\sim A \& B) | (A \& \sim B)$ 
  - » Exactly one of A and B is true
- $A \wedge B = (A | B) \& \sim(A \& B)$ 
  - » Either A is true, or B is true, but not both

29

## General Boolean Algebras

### Operate on Bit Vectors

- Operations applied bitwise

$$\begin{array}{cccc}
 01101001 & 01101001 & 01101001 & \\
 \& 01010101 & | 01010101 & \wedge 01010101 & \sim 01010101 \\
 \hline
 01000001 & 01111101 & 00111100 & 10101010
 \end{array}$$

All of the Properties of Boolean Algebra Apply

30

## Representing & Manipulating Sets

### Representation

- Width  $w$  bit vector represents subsets of  $\{0, \dots, w-1\}$
- $a_j = 1$  if  $j \in A$ 
  - 01101001                       $\{0, 3, 5, 6\}$
  - 76543210
  - 01010101                       $\{0, 2, 4, 6\}$
  - 76543210

### Operations

- $\&$  Intersection                      01000001  $\{0, 6\}$
- $|$  Union                              01111101  $\{0, 2, 3, 4, 5, 6\}$
- $\wedge$  Symmetric difference              00111100  $\{2, 3, 4, 5\}$
- $\sim$  Complement                      10101010  $\{1, 3, 5, 7\}$

31

## Bit-Level Operations in C

### Operations $\&$ , $|$ , $\sim$ , $\wedge$ Available in C

- Apply to any "integral" data type
  - long, int, short, char
- View arguments as bit vectors
- Arguments applied bit-wise

### Examples (Char data type)

- $\sim 0x41 \rightarrow 0xBE$   
 $\sim 01000001_2 \rightarrow 10111110_2$
- $\sim 0x00 \rightarrow 0xFF$   
 $\sim 00000000_2 \rightarrow 11111111_2$
- $0x69 \& 0x55 \rightarrow 0x41$   
 $01101001_2 \& 01010101_2 \rightarrow 01000001_2$
- $0x69 | 0x55 \rightarrow 0x7D$   
 $01101001_2 | 01010101_2 \rightarrow 01111101_2$

32

## Contrast: Logic Operations in C

### Contrast to Logical Operators

- $\&\&$ ,  $||$ ,  $!$ 
  - View 0 as "False"
  - Anything nonzero as "True"
  - Always return 0 or 1
  - Early termination

### Examples (char data type)

- $!0x41 \rightarrow 0x00$
- $!0x00 \rightarrow 0x01$
- $!!0x41 \rightarrow 0x01$
- $0x69 \&\& 0x55 \rightarrow 0x01$
- $0x69 || 0x55 \rightarrow 0x01$
- $p \&\& *p$  (avoids null pointer access)

33

## Shift Operations

### Left Shift: $x \ll y$

- Shift bit-vector  $x$  left  $y$  positions
  - Throw away extra bits on left
  - Fill with 0's on right

Argument $x$	01100010
$\ll 3$	00010000
Log. $\gg 2$	00011000
Arith. $\gg 2$	00011000

### Right Shift: $x \gg y$

- Shift bit-vector  $x$  right  $y$  positions
  - Throw away extra bits on right
- Logical shift
  - Fill with 0's on left
- Arithmetic shift
  - Replicate most significant bit on right
  - Useful with two's complement integer representation

Argument $x$	10100010
$\ll 3$	00010000
Log. $\gg 2$	00101000
Arith. $\gg 2$	11101000

34

## Cool Stuff with Xor

- Bitwise Xor is a form of addition
- With extra property that every value is its own additive inverse

$$A \wedge A = 0$$

```
void funny(int *x, int *y)
{
    *x = *x ^ *y; /* #1 */
    *y = *x ^ *y; /* #2 */
    *x = *x ^ *y; /* #3 */
}
```

	*x	*y
Begin	A	B
1	$A \wedge B$	B
2	$A \wedge B$	$(A \wedge B) \wedge B = A$
3	$(A \wedge B) \wedge A = B$	A
End	B	A

35

## Main Points

### It's All About Bits & Bytes

- Numbers
- Programs
- Text

### Different Machines Follow Different Conventions

- Word size
- Byte ordering
- Representations

### Boolean Algebra is Mathematical Basis

- Basic form encodes "false" as 0, "true" as 1
- General form like bit-level operations in C
  - Good for representing & manipulating sets

36